

etalbond

COMPOSITE MATERIALS

bond with excellence

ELVAL COLOUR
Power to imagine






bond with excellence



Composition

- Protective plastic film
- High Quality Coating System
- Aluminium (Alloy EN 3105, Temper H44)
- Adhesive layer
- Polyethylene / fire retardant*
- Adhesive layer
- Aluminium (Alloy EN 3105, Temper H44)
- High Quality Coating System or Primer coating
- *according to SBI-EN 13823 CLASS.EN 13501 B₁, S₁, d₀

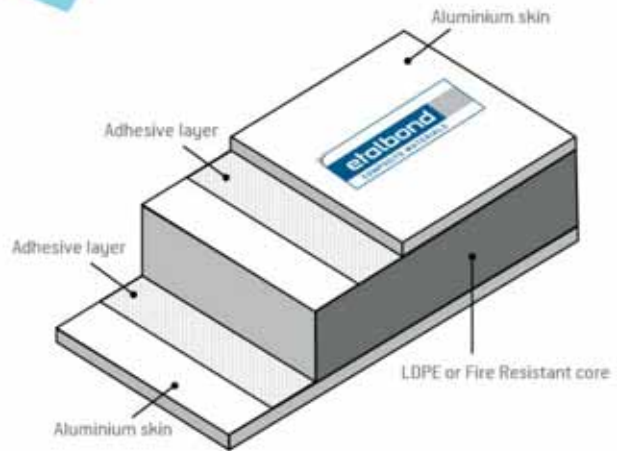

Colour appearance and design

Being one of the leading coating companies in Europe with an output of more than 30 million m² produced in 4 coating lines, with over 30 years experience, Elval Colour is able to create many opportunities for all fields in architectural engineering.

etalbond[®] products are available in various colours presenting a wide selection for the realisation of your ideas. **etalbond**[®] multilayer paint systems, offer advanced resistance to aggressive weather conditions, polluted environments and UV-radiation. Combining surface endurance with workability, **etalbond**[®] can adapt to any desired shape, independent of its complexity, using standard techniques (including roll bending, routing, folding) and others.

AREAS OF ARCHITECTURAL ENGINEERING:

- Ventilated claddings
- Corporate identity
- Roofing applications and edgings
- Ceilings
- Signage and advertising
- Exhibition stands
- Industrial applications



A cladding creative material

etalbond® consists of a non toxic polyethylene/fire retardant core, contained between two aluminium skins. For more than 20 years etalbond offers excellent solutions in the field of architecture applications.

etalbond® has outstanding product properties such as flatness, durability, formability and can be offered in a wide variety of colours and dimensions.



PROCESSING - ROUTING - FOLDING

Due to its adaptability **etalbond®** can be shaped by means of simple processing techniques. This procedure, the routing and folding technique, enables a variety of shapes and sizes to be manufactured. After having routed the material (one side) the untouched outer cover sheet can be bent manually giving an exact folding and clean folding line which follows the routed groove.

All standard machinery devices can be used for the following pictogram below.



CUTTING & SAWING



DRILLING



PUNCHING



CONTOUR MILLING




JOINING & FIXING TECHNIQUES



BENDING - FORMING

Routing & Folding

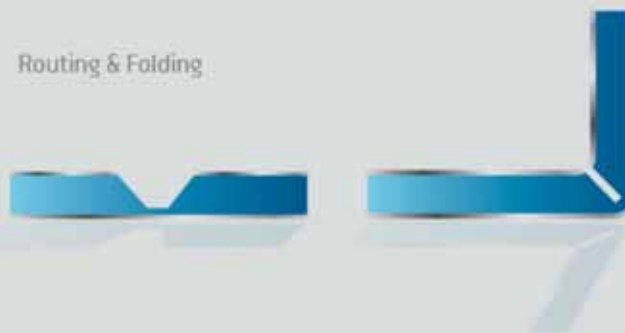



bond with excellence

ELVAL COLOUR SUPPORT SYSTEMS

Elval Colour provides specially designed support systems for the easy installation of etalbond panels on the various building facades applications.



etalbond® characteristics

etalbond® composite panel is the ideal material for projects exposed to highly demanding environments, offering the flexibility to be used in various architectural and printing applications.

Flatness: superior flatness in respect to other solid aluminium sheets.

Rigidity – light weight: Due to our sandwich technology our composite panels out performs other materials with regards to needed substructure and design capabilities.

Formability: Due to its excellent formability etalbond® can easily be shaped in many forms, always retaining its high durability and flatness.

ECO – Friendly: Both aluminium skins and the core are 100% recyclable.

Dimensions: Thickness between 3-6mm
Width between 1000mm-2000mm
Length maximum 13000mm



Technical data sheet etalbond-PE

| Panel etalbond-PE thickness | mm | 3 | 4 | 6 |
|--|----------------------|--------------------------------------|------|------|
| PANEL DIMENSIONS | | | | |
| Aluminium Thickness | mm | 0.5 | 0.5 | 0.5 |
| Panel Weight | Kg/m ² | 4.6 | 5.5 | 7.3 |
| Panel Width | mm | [MIN 1000 - MAX 2000] std 1250, 1500 | | |
| Panel Length | mm | 1000 - 11000 | | |
| ALUMINIUM MECHANICAL PROPERTIES | | | | |
| Elongation A50 | | ≥ 4% | | |
| PANEL CHARACTERISTICS | | | | |
| Rigidity (EJ) | KNcm ² /m | 1250 | 2400 | 5900 |
| ALUMINIUM ALLOY | | AL 3105 / H44 (Painted) | | |
| TEMPERATURE RANGE | | | | |
| Operational Temperature Range | | From -50°C to +80°C | | |
| ACOUSTICAL PROPERTIES | | | | |
| Sound Transmission Loss (Rw) | dB | 25 | 26 | 27 |

Technical data sheet etalbond-fire retardant

| Panel etalbond-FR thickness | mm | 4 | 6 |
|--|----------------------|--|------|
| PANEL DIMENSIONS | | | |
| Aluminium Thickness | mm | 0.5 | 0.5 |
| Panel Weight | Kg/m ² | 7.6 | 11.0 |
| Panel Width | mm | [MIN 1000 - MAX 2000] std 1250, 1500 | |
| Panel Length | mm | std 3200 MAX 13000 | |
| ALUMINIUM MECHANICAL PROPERTIES | | | |
| Elongation A50 | | ≥ 4% | |
| PANEL CHARACTERISTICS | | | |
| Rigidity (EJ) | KNcm ² /m | 2400 | 5900 |
| ALUMINIUM ALLOY | | AL 3105 / H44 (Painted) | |
| TEMPERATURE RANGE | | | |
| Operational Temperature Range | | From -50°C to +80°C | |
| MECHANICAL PROPERTIES | | | |
| Tensile Strength (Rm) | N/mm ² | ≥ 150 | |
| Yield Strength (Rp0.2) | N/mm ² | ≥ 120 | |
| Elongation | % | A50 ≥ 3 | |
| Linear Thermal Expansion: | | 2,4mm/m for a 100°C temperature difference | |





bond with excellence

A quality composition

Whether a project is taking place in a town centre, with high smog exposure, or close to coastal areas, with high levels of salt and humidity, the surface of the material is subject to the risk of rapid fading or oxidation.

etalbond® surface is available in high quality coatings such as Very high durability polyesters (VHDPE), PVDF-2, 3 and 4 Layers and Lumiflon. In each case the coating process follows the most appropriate specification according to ECCA (European Coil Coating Association) and AAMA (American Association of Manufacturers) Standards. Paint coating tests meet the ECCA testing requirements and the entire production process is ISO 9001 - 2008 and ISO 14001 certified.



ELVAL COLOUR

Elval Colour is a leading European manufacturer in the architectural coated metal products field. Established in 1981 as subsidiary of ELVAL S.A., which is a division of the VIOHALCO Group, it operates 4 liquid coating lines and a powder coating line with capacity to paint in excess of 30 million m² per year.

Besides the coating facilities, Elval Colour also produces metal composite materials, perforated and corrugated sheets to fulfill all building envelope market requirements.



100%
Recyclable material
Respects
the environment

ELVAL COLOUR
3rd km. Inofyta Peripheral Rd.,
32011, Saint Thomas, Viotia, Greece
tel: +30 22620 53564, fax: +30 22620 53581

ecs@elval.vionet.gr

www.elval-colour.com

Power to imagine

CUSTOMERS LINE:

+30 22620 53 594

ELVAL COLOUR